



ThermoTemp Thermoelectric Air Conditioner TT-200-4X Series SPEC SHEET



TECHNICAL SPECIFICATIONS

Cooling Capacity at $\Delta T = 0^{\circ}\text{C}$)	60 W / 205 BTU
Voltage	24 VDC
Current $\pm 10\%$,	3.7 ADC
Weight	4.3 kg / 9.4lbs
Over-Temp Thermostat (internal heat sink)	100°C
Operating Ambient Temperature Range	-15 to 50°C / 5 to 122°F

TECHNICAL DRAWINGS AND DIMENSIONS

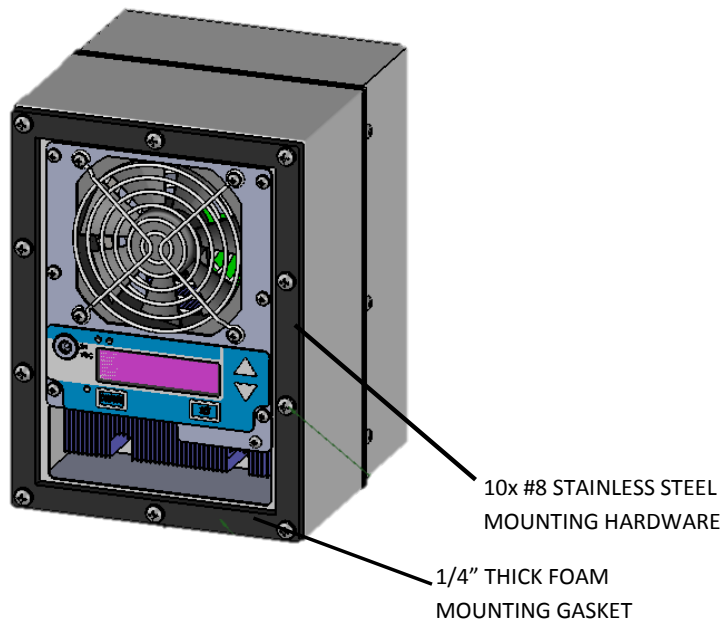


Figure 1. External View

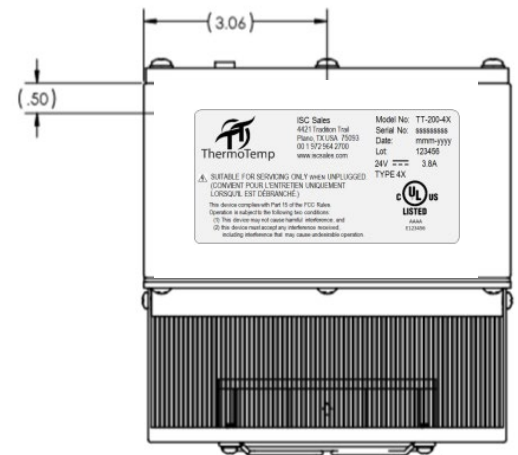


Figure 2. Bottom View

Dimensions in Inches

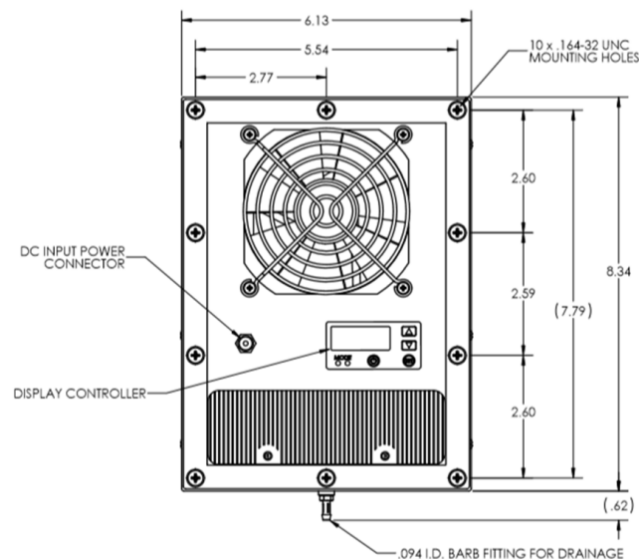


Figure 3. Top and Side View, Vertical Orientation

GENERAL SAFETY WARNINGS

WARNING: ELECTRICAL SHOCK HAZARD**AVERTISSEMENT: RISQUE DE CHOC**

The TT-200-4X unit is designed to be operated only with the included AC/DC power adapter. The included adapter provides the correct nominal input power level defined in the Technical Specifications table and printed on the product label.

- **DO NOT operate with a non-approved or damaged power adapter.**
- **DO NOT exceed the maximum rated input voltage to the TT-200-4X unit.**
- **DO NOT exceed the maximum rated input voltage to the power adapter.**
- **USE CAUTION when making electrical connections.**
- **Mount the unit to the enclosure BEFORE powering for operational use.**
- **Refer to mounting instructions in the Installation section BEFORE mounting unit to enclosure.**

